

FIG. 1

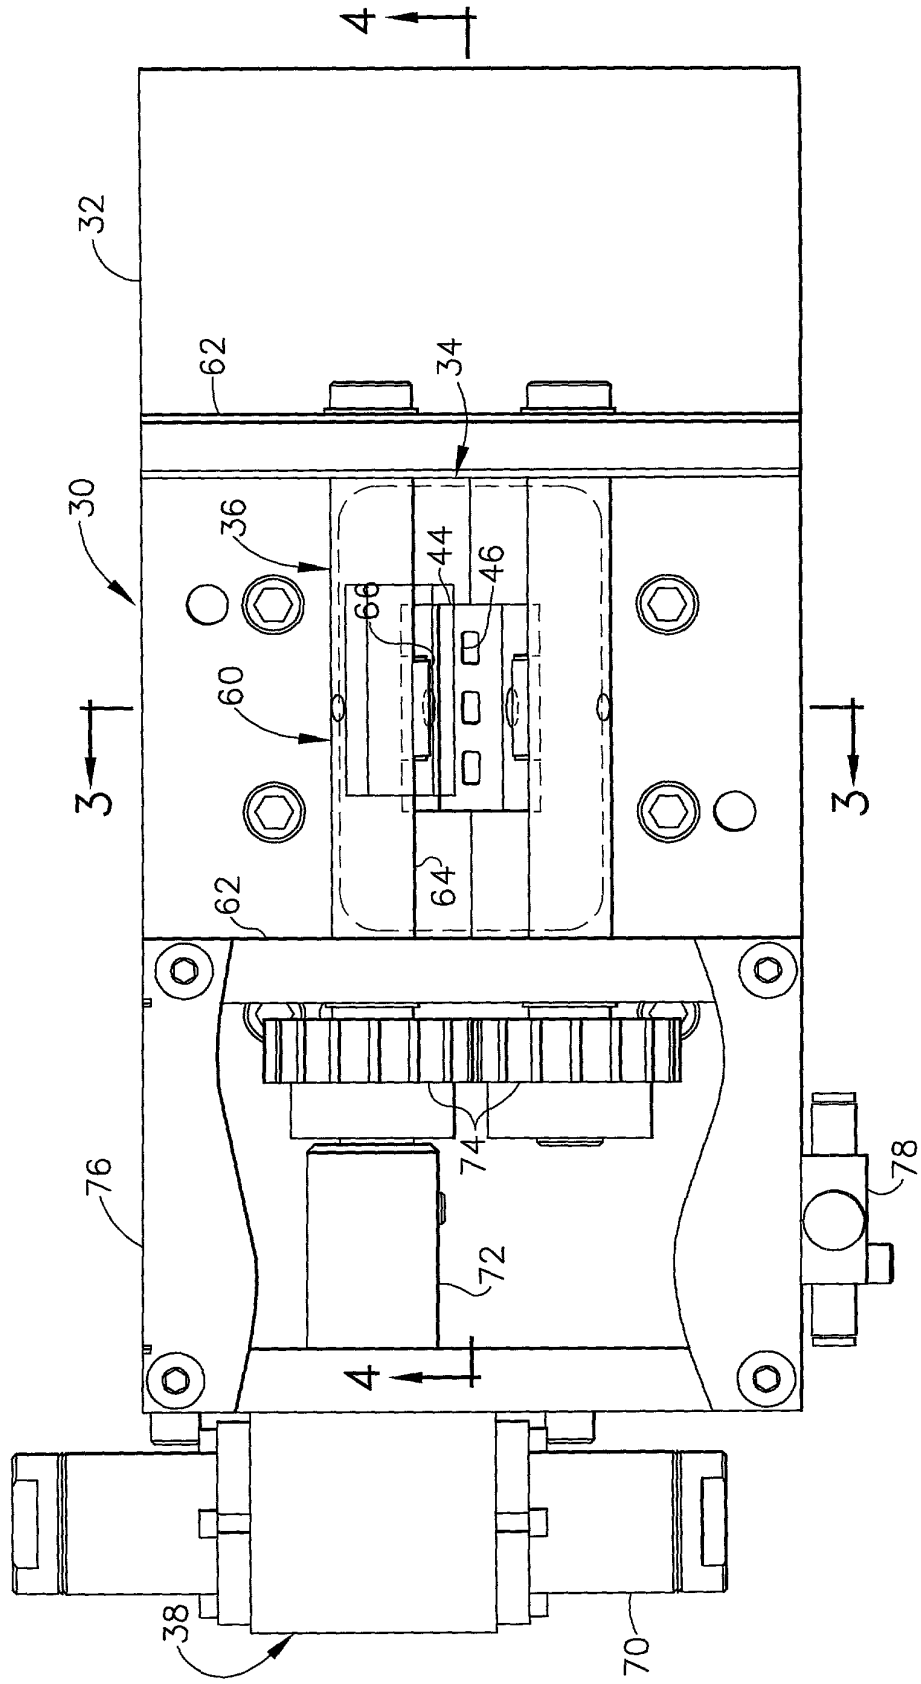


FIG. 2

FIG. 3 is a cross-sectional view of a device 30, showing a housing 32 with a central opening 40. A plug 42 is seated within the opening 40, and a plug 44 is seated within a side opening 46. The plug 42 is secured by a cap 48 and a nut 50. The plug 44 is secured by a cap 52 and a nut 54. The device 30 also includes a base 60, a top 62, and a side 64. A handle 66 is attached to the top 62, and a handle 68 is attached to the side 64. A handle 70 is attached to the base 60. A handle 74 is attached to the top 62. A handle 76 is attached to the side 64. A handle 78 is attached to the base 60.

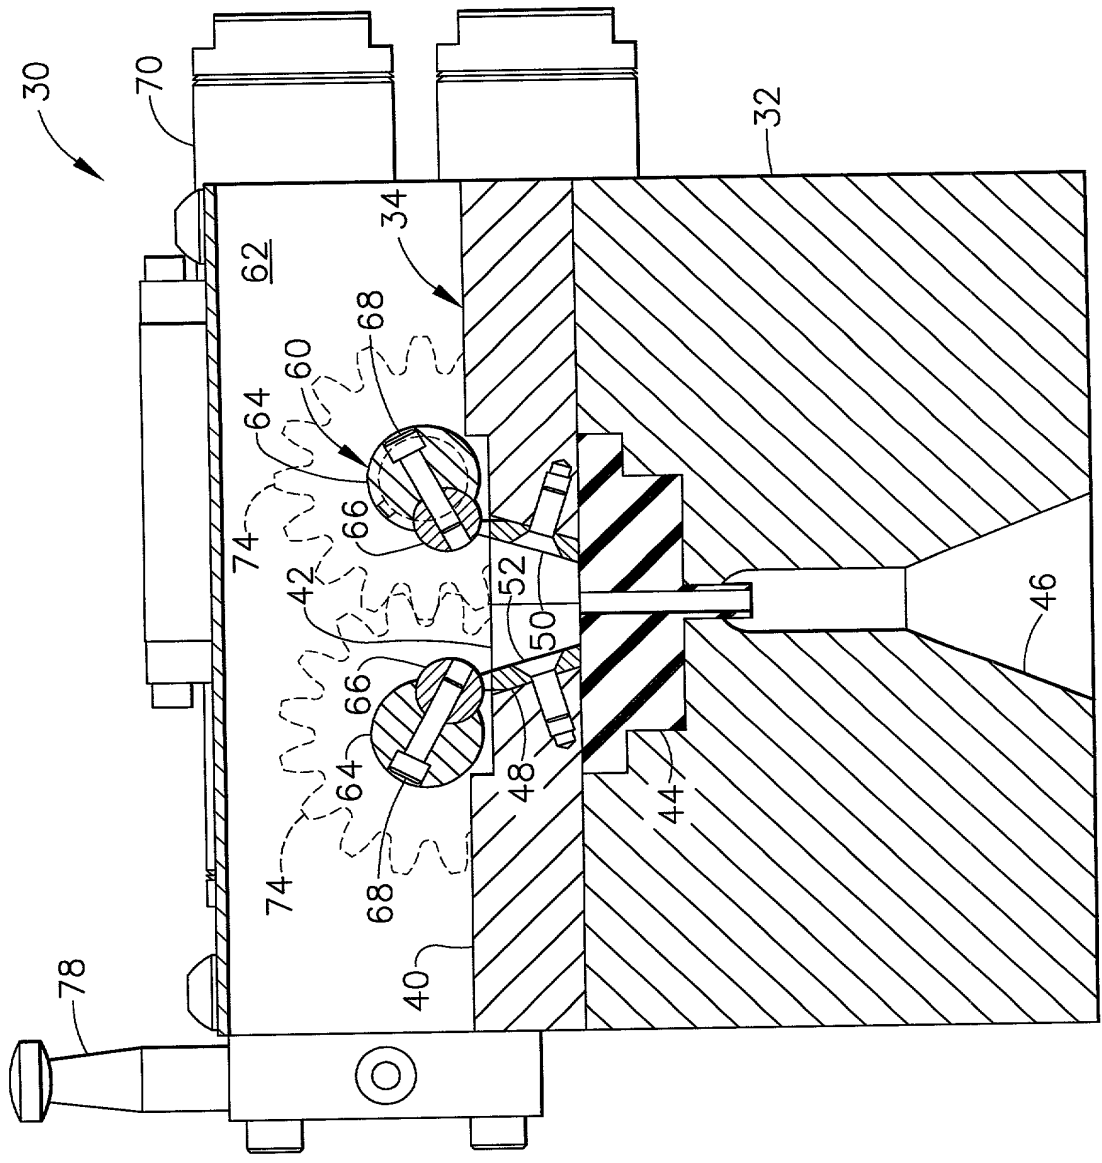


FIG. 3

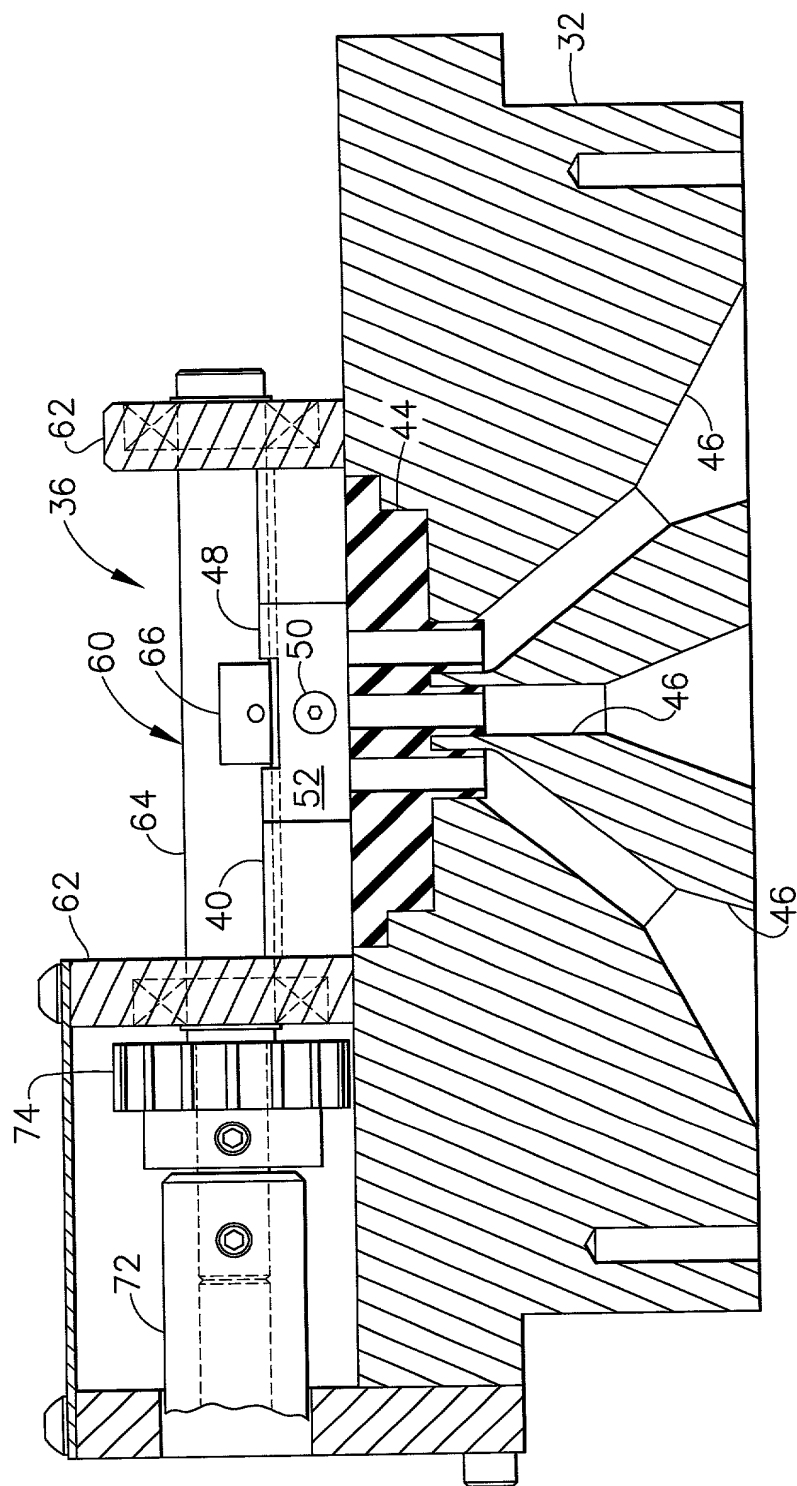


FIG. 4

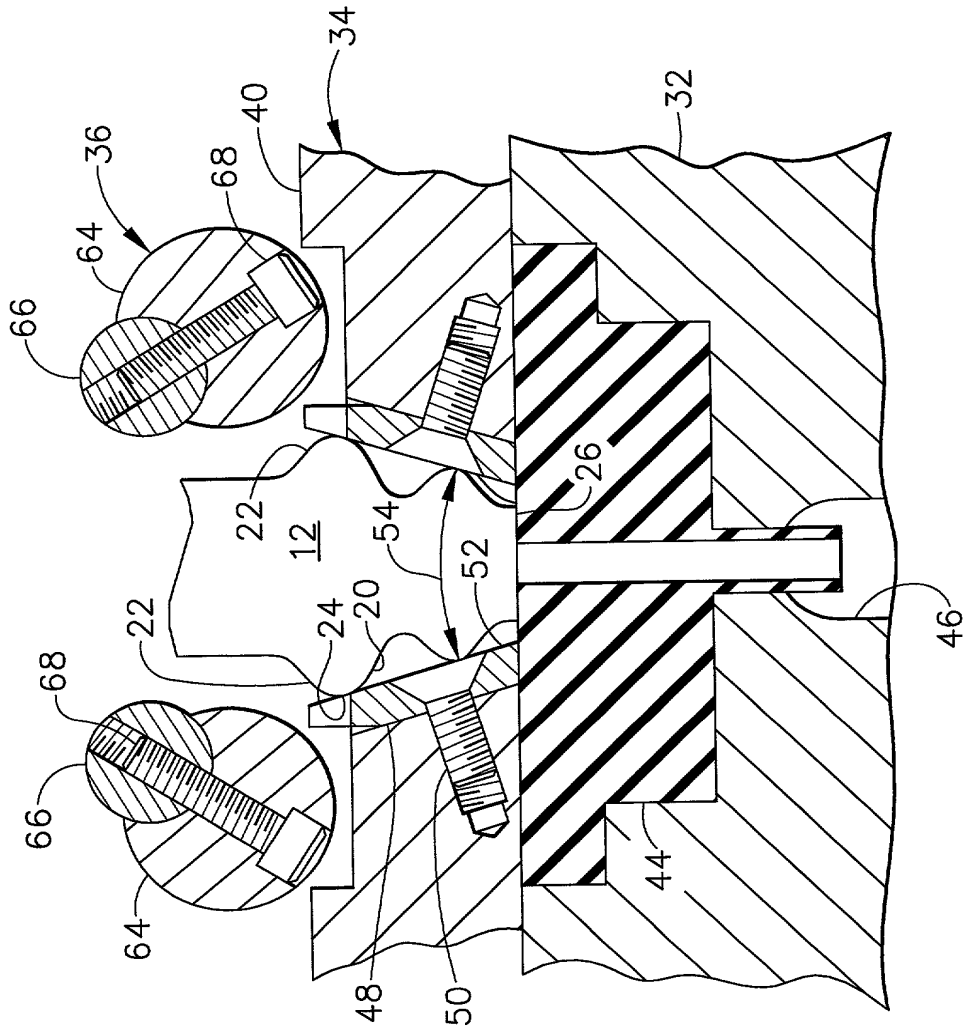


FIG. 5

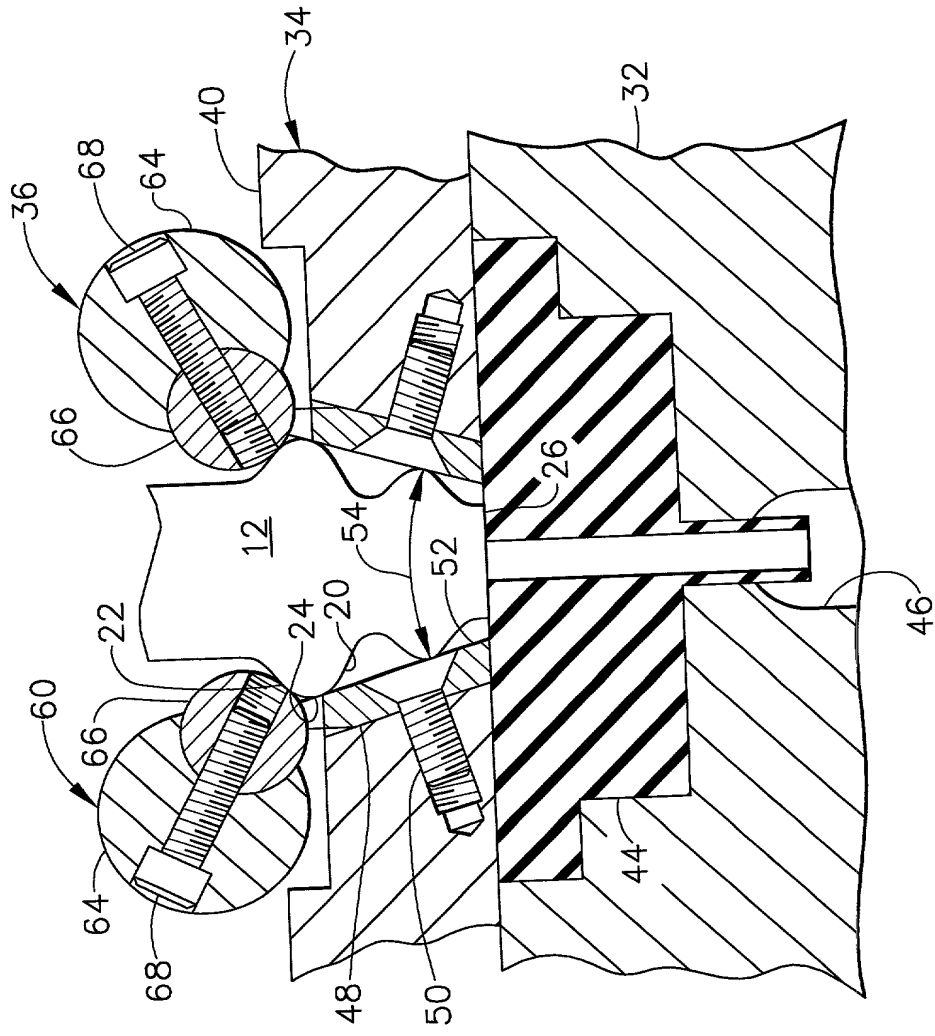


FIG. 6

